

Herringbone floors

Herringbone floors have rich history as a traditional floor pattern in Europe. It can be installed in several configurations, with or without a border. A popular variation of the herringbone, called Chevron or French herringbone, is prominent in many prestigious European Chateaus.

*Standard option is solid wood board. Also available as **engineered**. 2-layer engineered floor*


Herringbone refers to standard rectangular boards, all of which are the same size. It can be installed in diagonal or single pattern.

Chevron or French Herringbone refers to boards cut on both ends at 45° angle, measured from tip to tip on the same side.


Double herringbone are rectangular boards made in three sizes, listing the largest size in the selection. Please see the patterns below for more information.

Herringbone floor patterns


Diagonal

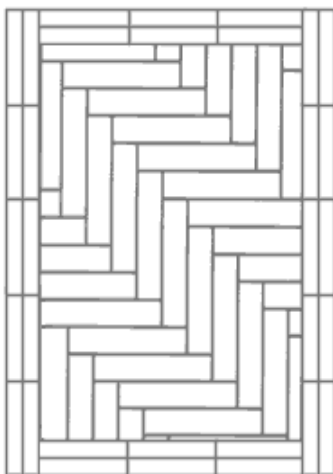


Single

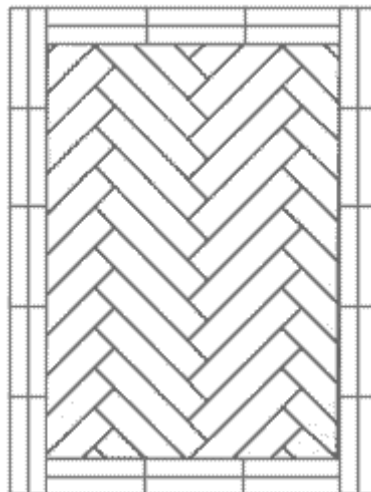

Double

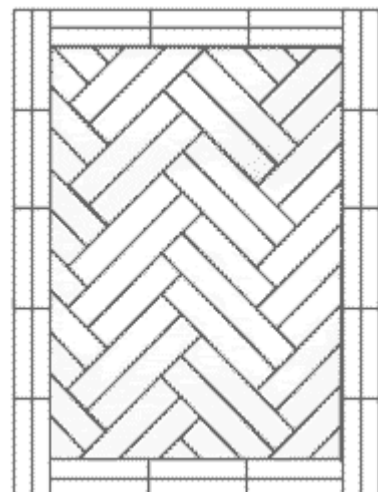


Chevron

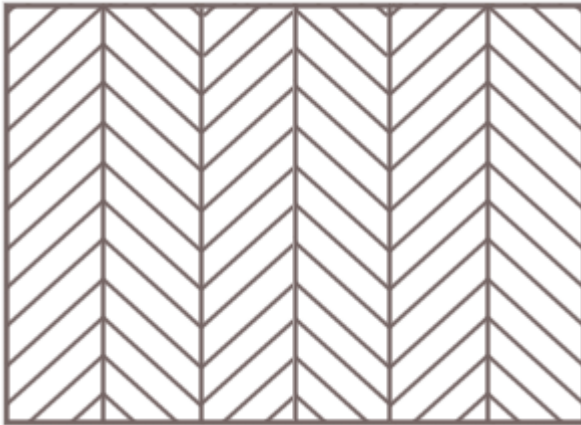

Kormos Floors Herringbone is supplied as pre-cut T&G unfinished hardwood pieces -that can be assembled on site in different configurations.

Herringbone floors are typically installed piece-by-piece in various configurations, either parallel to the wall or diagonally (as pictured above). Herringbone often looks best with the points running in the longest direction of a room or directed at a focal point. Diagonal installation visually expands the room, but requires more material - add at least 15% extra if you are doing this type of installation.

Sometimes you need to know the size of the repeating pattern to properly layout the room and select optimal board size. The handy calculator below allows to find those dimensions. Select the size of your herringbone from the list where "W" and "L" refers to width and length of individual pieces. Other dimensions A and B will re-calculate automatically. "A" for standard herringbone, "B" - for Chevron.

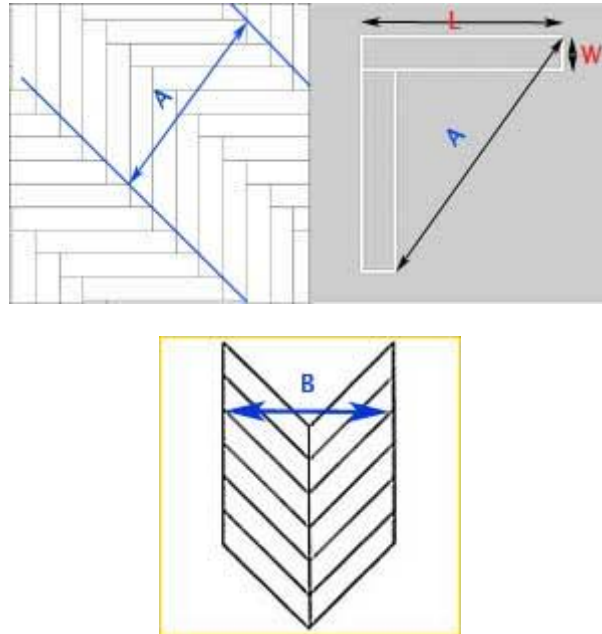

For the best results, the herringbone is installed by glue-down or a combination of nail-down and glue-down. Herringbone pieces have grooves on three sides and one tongue on the long side. It all starts with proper milling, more-so with a herringbone than with any other pattern. If multiple fillet widths do not exactly add up to the fillet length the pattern will be impossible to maintain.

Solid or Engineered.

Please call for other grades.

You may expect 2-3 weeks lead time for most flooring and 4-6 weeks for specialty order.

All planks are back-channeled. Moisture content is between 6.5% and 8.5% and not more than 9% in any single board. Kormos Floors oak is the best quality Appalachian whit oak (*Quercus*) grown in the Europe. Comparing to other oak species this wood material has much more consistent color variation, tight grain, beautiful tone when finished.

Hardwood floor planks can be used to fill the areas between borders and walls with parquet installed inside the borders. This will create the beautiful appearance of a "wooden rug".

Kormos Floor can supply quality **plank** flooring at competitive prices. The benefit of ordering plank floor from the same source as your parquet, herringbone, is that you can insure that it will match in thickness and appearance to other decorative floor.

Please account for waste of at least 10%.

If ordering with parquet or herringbone, there is no minimum - please call to order.

